


# Cederberg Pavers



# Cederberg Pavers

- A rich biscuit colour blend with reduction and flash marks adding character and interest.
- An ideal paver for all domestic applications.
- Particularly ideal around pools as the colour is less heat absorbent and therefore more comfortable to bare feet.
- Excellent for all pavements and walkways.

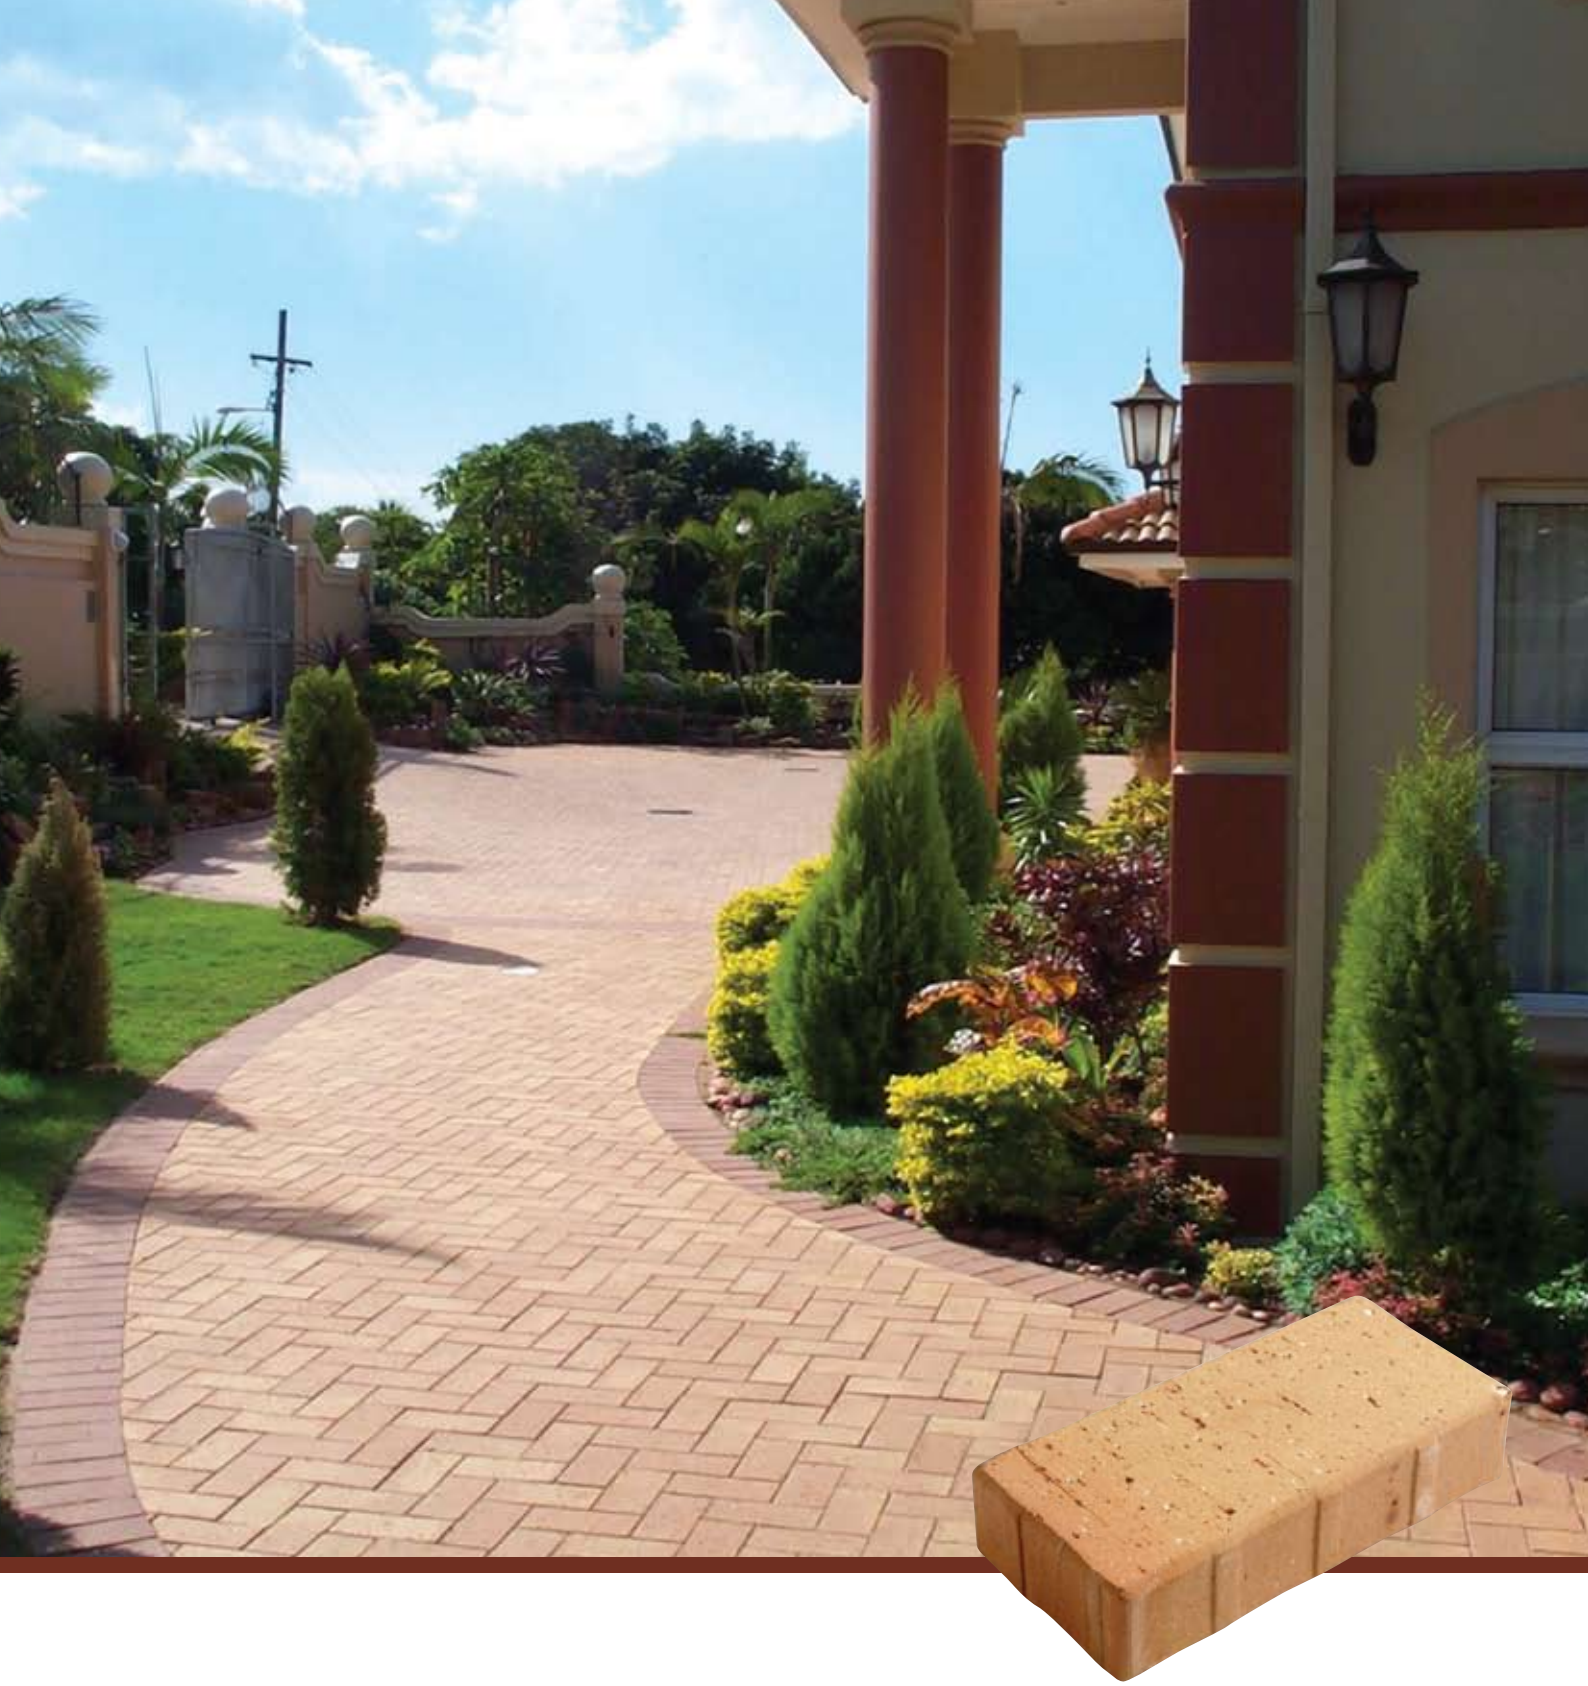

## Technical Information for Cederberg Pavers

PRODUCT	SABS Classification	Dimensions (mm)	Quantity/m <sup>2</sup> with 3mm Joints	Average Mass (kg)	Average Modulus of Rupture (MPa)	Typical 24hr Cold Water Absorption Ave (%)
Cederberg Pavers	PA	220 x 108.5 x 50	41	2.6	5.7	6
		200 x 98.5 x 60	48.5	2.5	5.0	6.5

\*The 60mm thick pavers typically have Modulus of Ruptures values in compliance with SABS PA Classification. 60mm thick pavers have been evaluated by Ninham Shand Consulting Engineers and can be expected to perform in 3.0 MESA (E2 Traffic Class) loading applications.

Every effort has been made in the photographic, reproduction and printing process to feature a portrayal of each panel as it would appear in real life. However, the only accurate way to assess the true aesthetic appeal of face brick is to view the product.